


300t

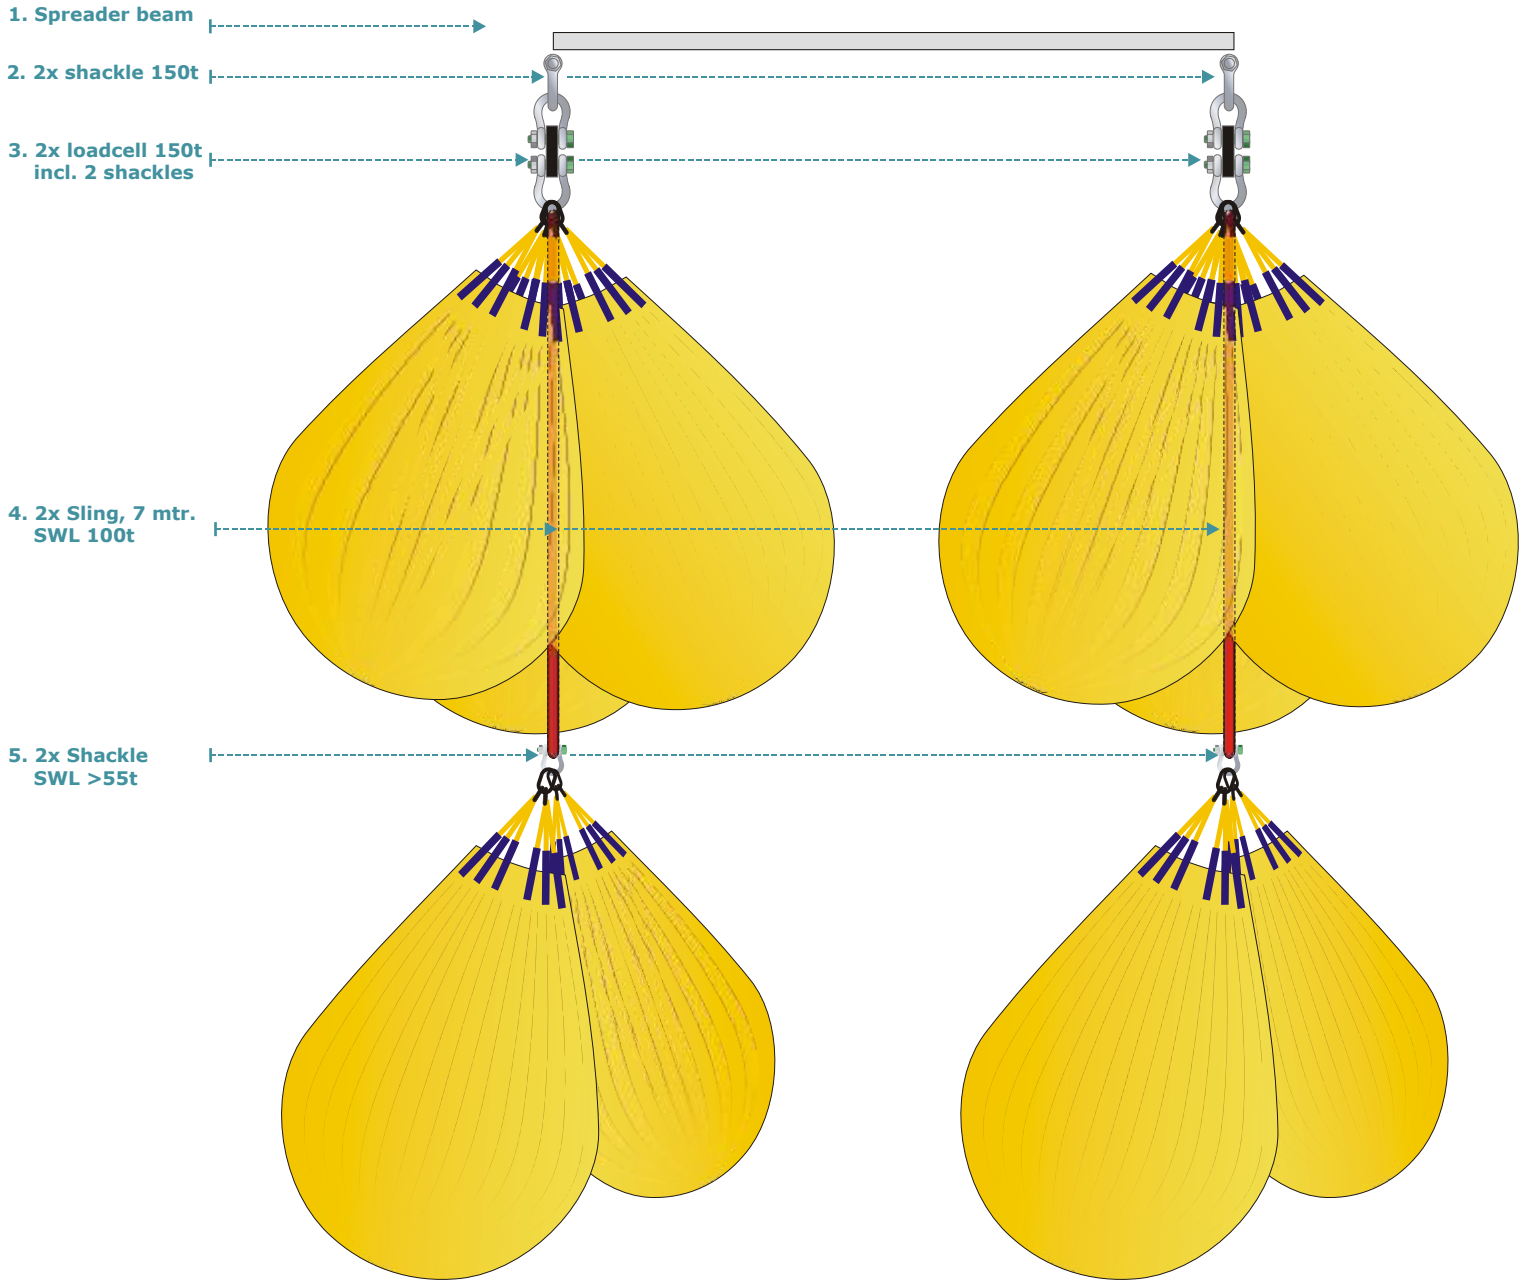


**200t**  
- 3 waterbags 35t  
- Sling SWL 100t, 7mtr  
- 1 waterbag 20t  
1 waterbag 35t

*Required height under  
spreader beam: 19 mtr.*

**200t**  
- 3 waterbags 35t  
- Sling SWL 100t, 7mtr  
- 1 waterbags 20t  
1 waterbags 35t

400t

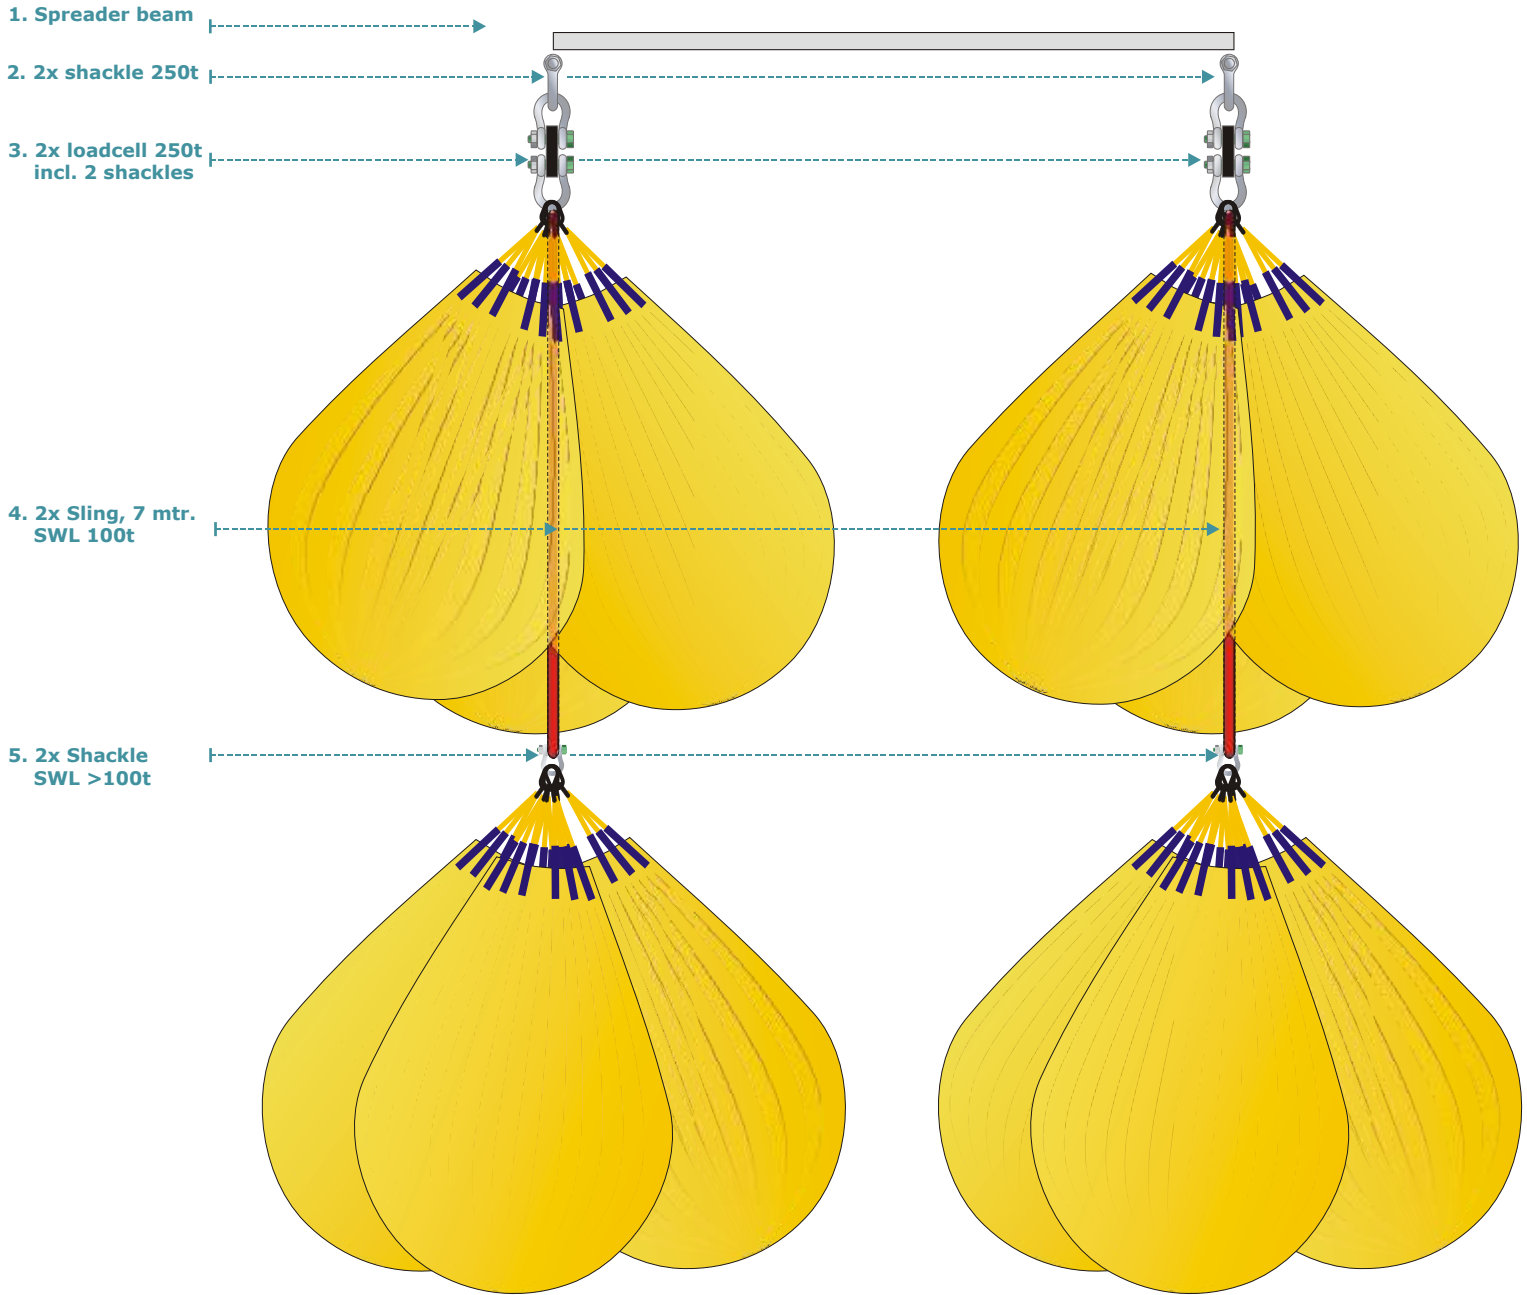


**200t**  
- 3 waterbags 35t  
- Sling SWL 100t, 7mtr  
- 3 waterbags 35t

*Required height under  
spreader beam: 19 mtr.*

**200t**  
- 3 waterbags 35t  
- Sling SWL 100t, 7mtr  
- 3 waterbags 35t

500t

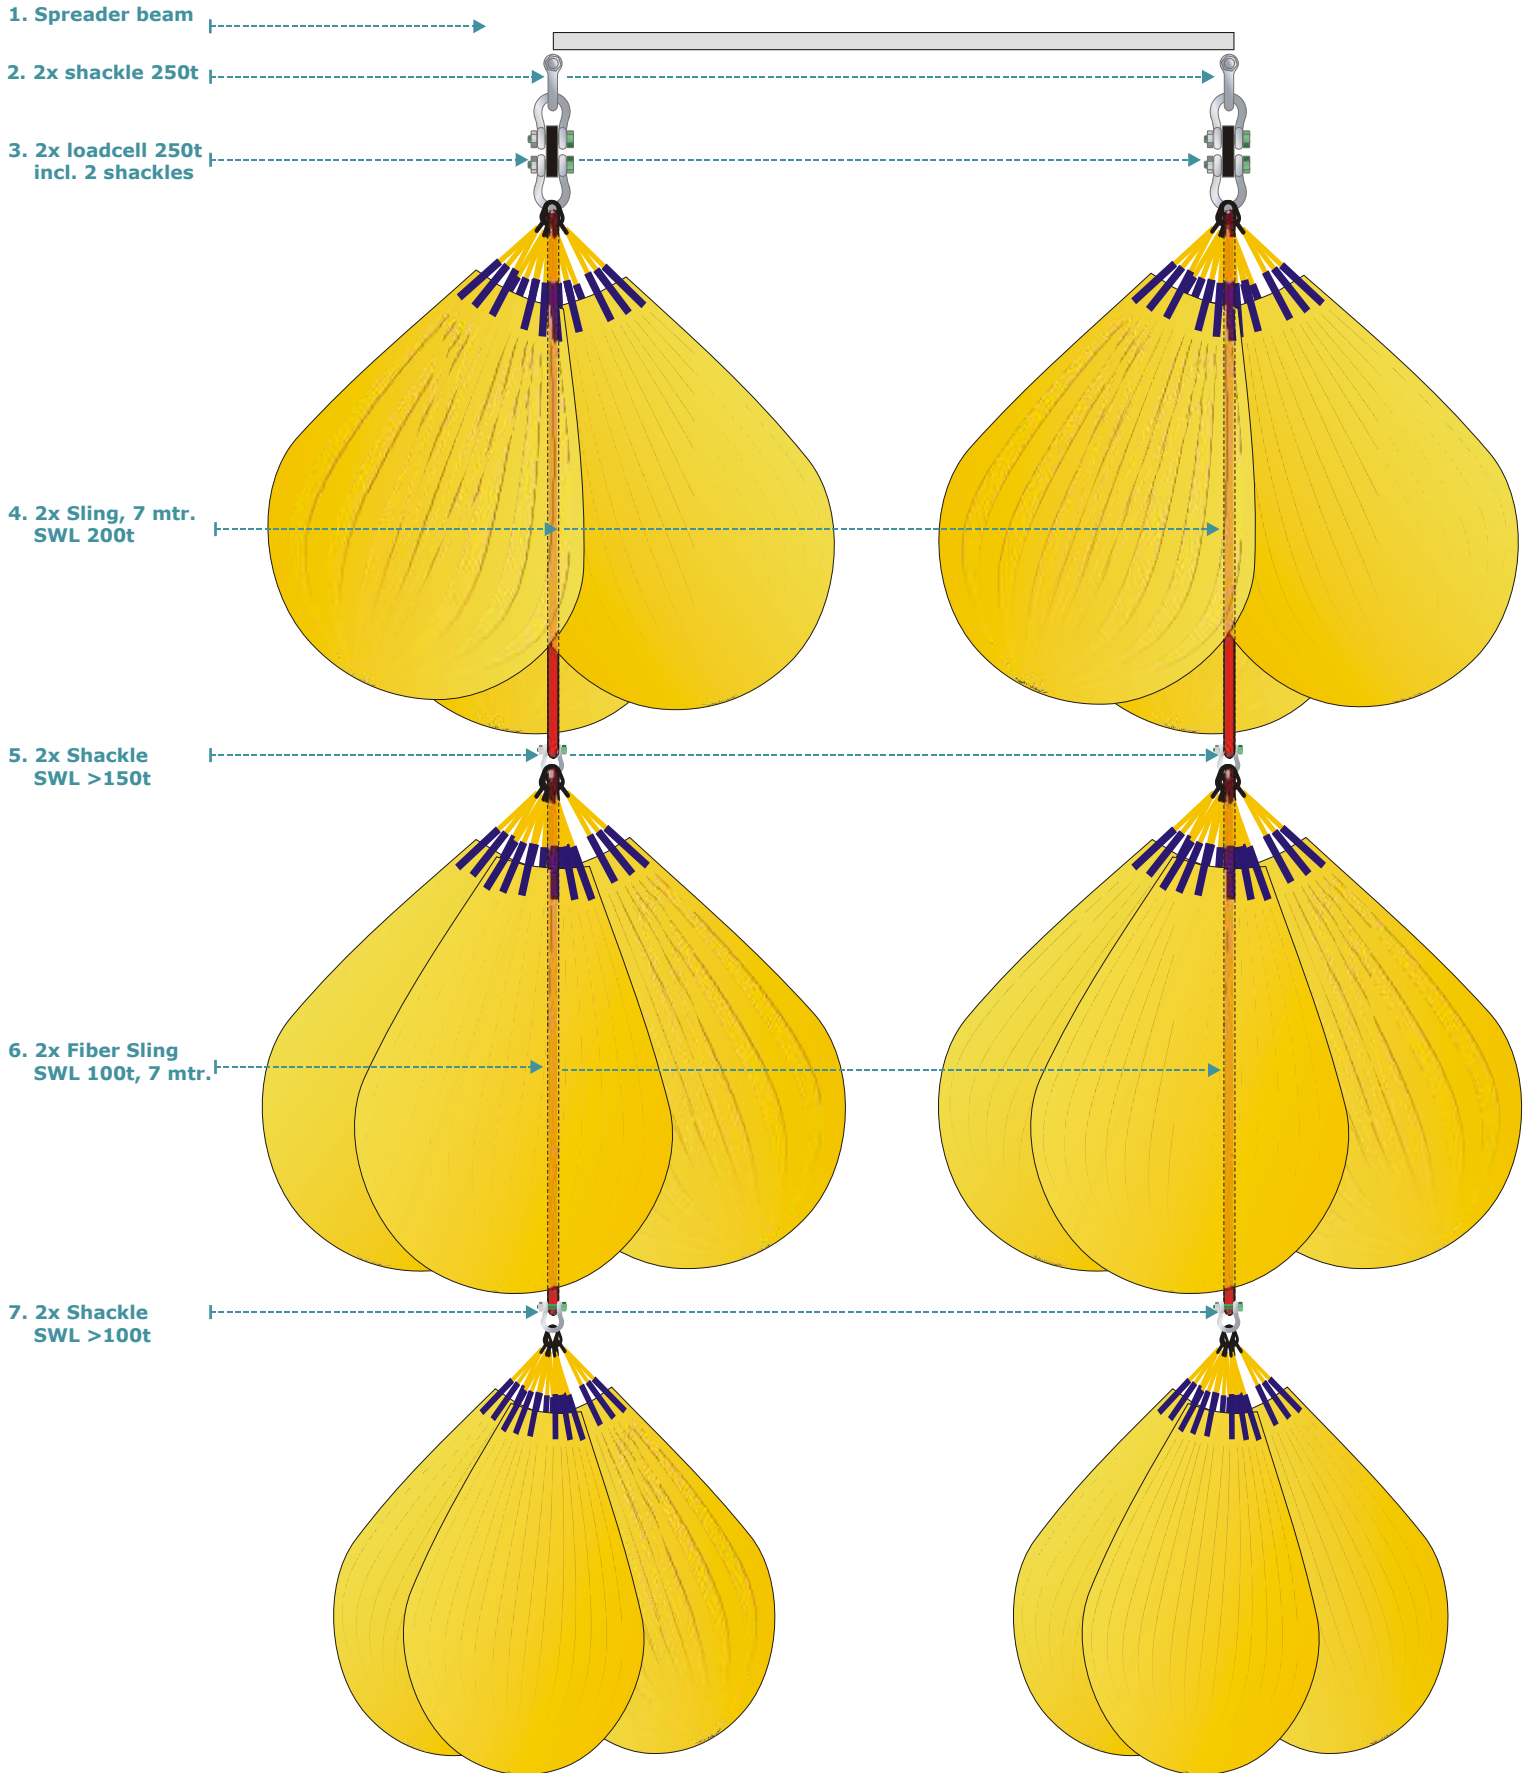

**250t**  
- 3 waterbags 35t  
- Sling SWL 200t, 7mtr  
- 3 waterbags 35t  
- Fiber Sling SWL 100t, 7mtr  
- 3 waterbags 20t

*Required height under  
spreader beam: 25 mtr.*

**250t**  
- 3 waterbags 35t  
- Sling SWL 200t, 7mtr  
- 3 waterbags 35t  
- Fiber Sling SWL 100t, 7mtr  
- 3 waterbags 20t

600t

1. Spreader beam

2. 2x shackle 250t


3. 2x loadcell 250t  
incl. 2 shackles

4. 2x Sling, 7 mtr.  
SWL 200t

5. 2x Shackle  
SWL >150t

6. 2x Fiber Sling  
SWL 100t, 7 mtr.

7. 2x Shackle  
SWL >100t

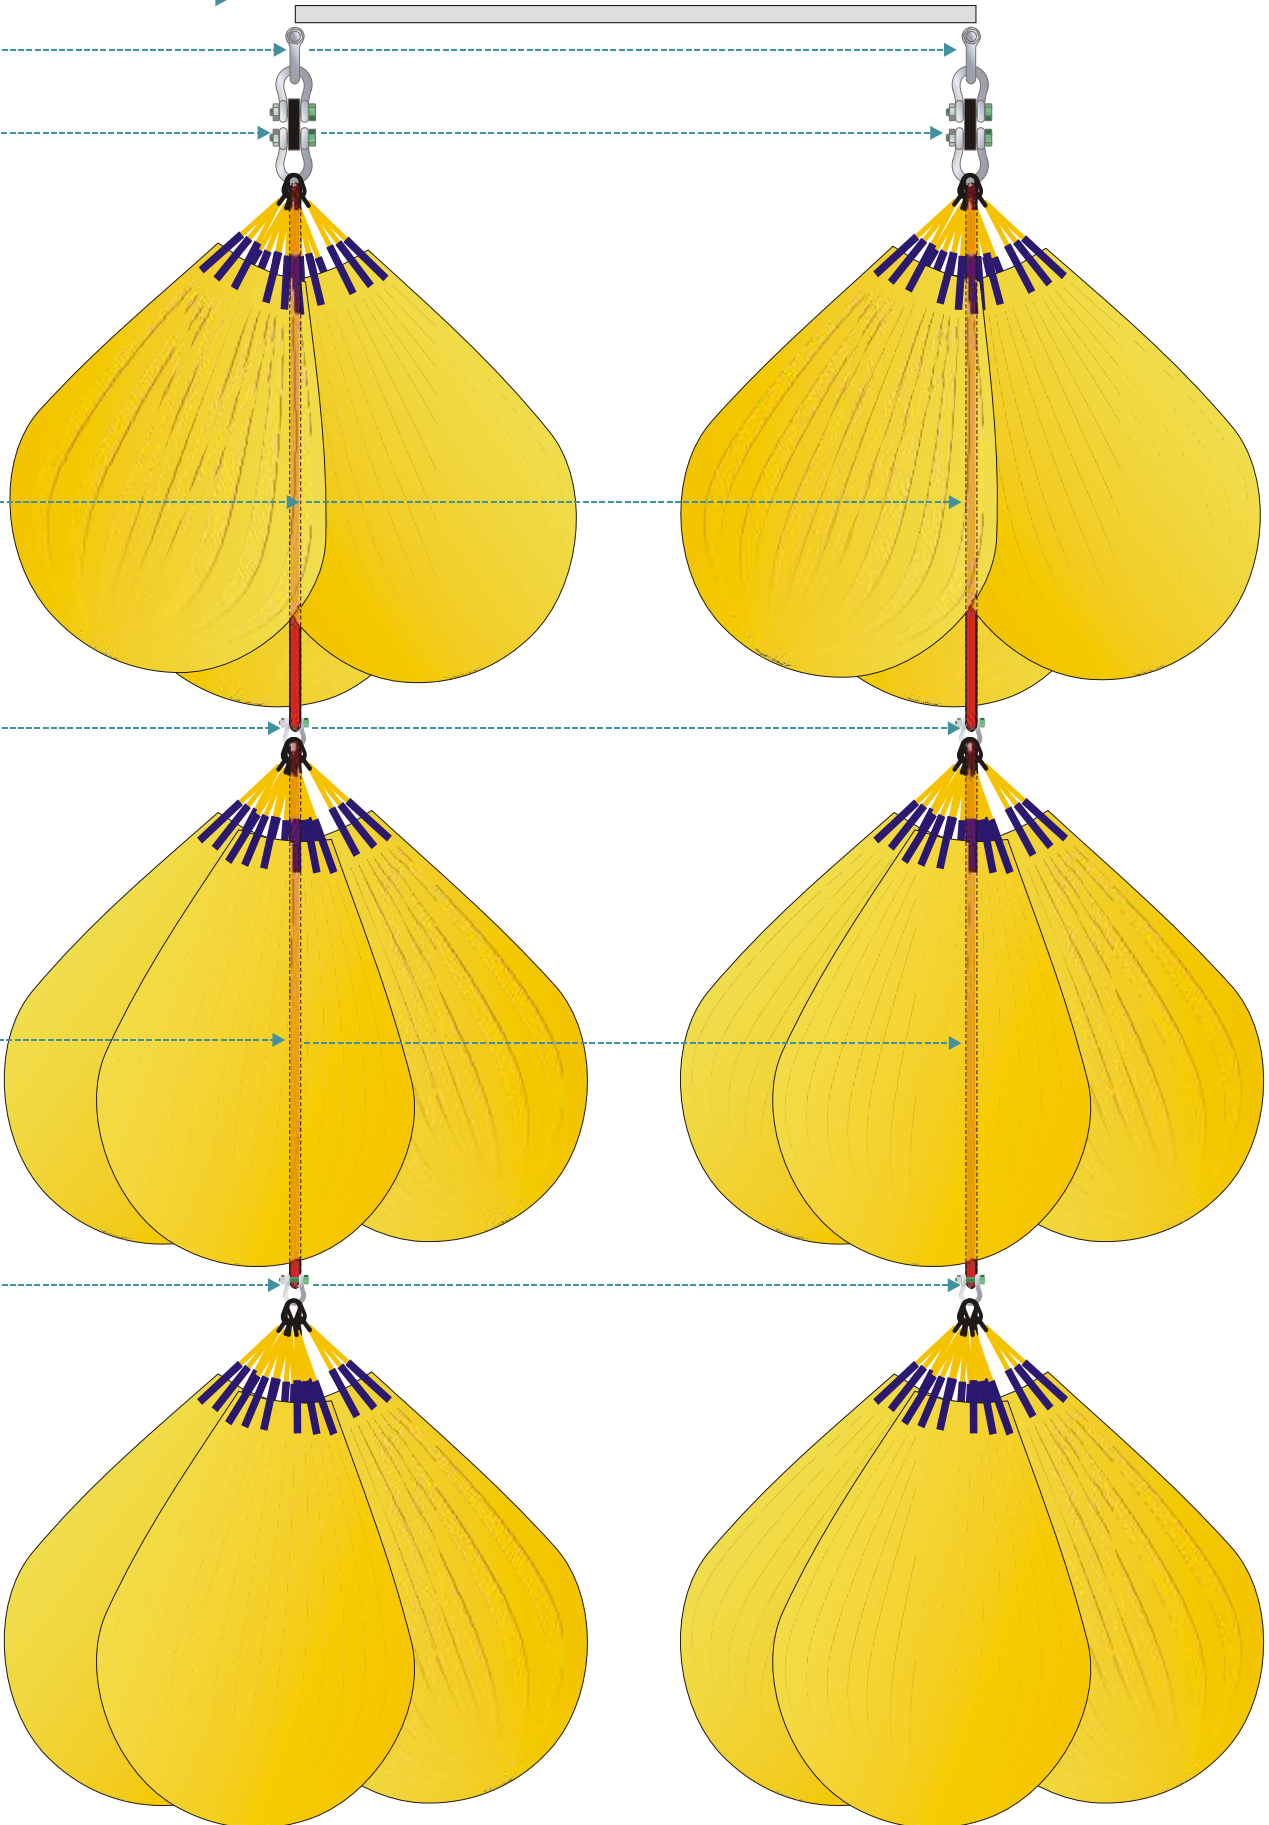

**300t**  
- 3 waterbags 35t  
- Sling SWL 200t, 7mtr  
- 3 waterbags 35t  
- Fiber Sling SWL 100t, 7mtr  
- 3 waterbags 35t

*Required height under  
spreader beam: 28 mtr.*

**300t**  
- 3 waterbags 35t  
- Sling SWL 200t, 7mtr  
- 3 waterbags 35t  
- Fiber Sling SWL 100t, 7mtr  
- 3 waterbags 35t